

ELETTROPOMPE SACEMI AD IMMERSIONE SERIE SP

SACEMI IMMERSION PUMPS SP SERIES



CARATTERISTICHE

IMPIEGHI

Sono adatte al trasferimento di liquidi contenenti impurità

Vengono comunemente impiegate su:

- Macchine utensili (fresatrici, torni)
- Macchine per la lavorazione del vetro (versione TRI)
- Impianti di trattamento superfici
- Impianti di filtrazione

Motore

2 poli - 2800 giri - trifase

Classe F IP55

CHARACTERISTICS

Uses

Suitable for transferring liquids containing impurities





Commonly used on:

- Machine tools (milling machines, lathes)
- Glass-working machines (TRI version)
- Surface treatment systems
- Filtering systems



Motor

2 poles - 2800 rpm - three-phase

Class F IP55

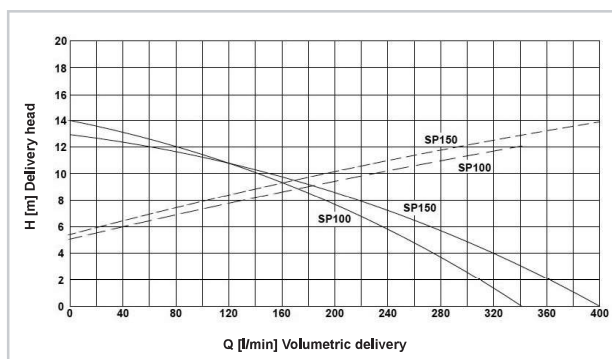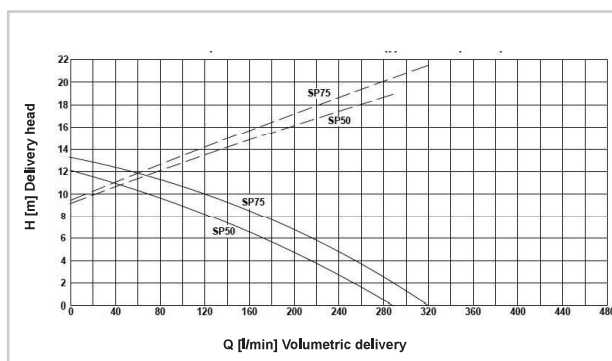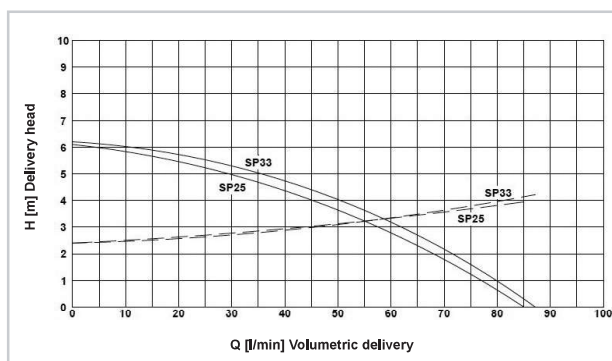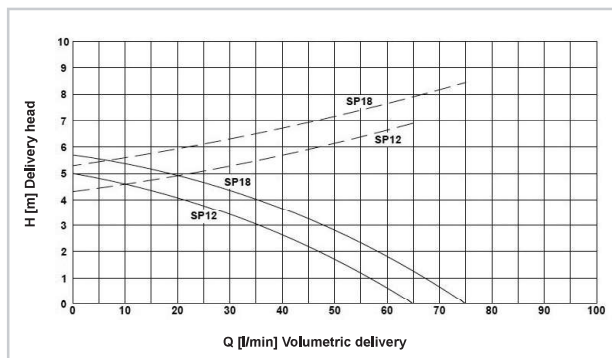

I dati riportati in questo diagramma sono riferiti ad una viscosità non superiore a 5 CST a 20°C.
The details shown on this diagram refer to a viscosity of not more than 5 CST at 20°C.

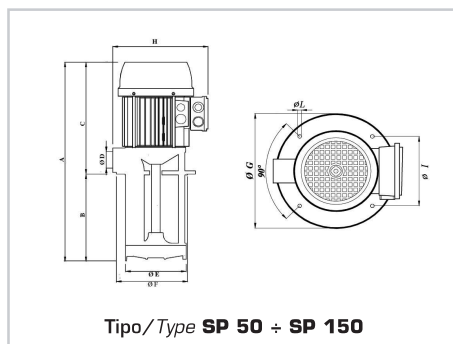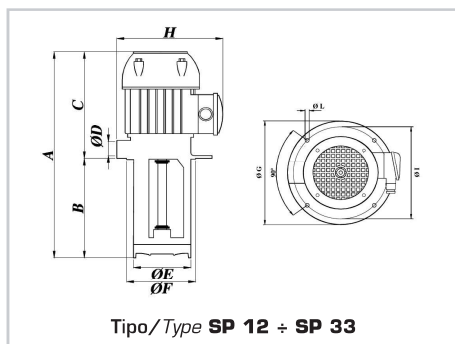

Articolo Art.	Tipo Type	Kw	A mm.	B mm.	C mm.	Ø D Gas	Ø E mm.	Ø F mm.	Ø G mm.	H mm.	Ø I mm.	Ø L mm.	Temp. Liquido Max Max Liquid Temp.
MU.221	SP 12	0.15	255	90	165	3/4"	98	100	130	151	115	7	70°C
MU.222			285	120									
MU.223			335	170									
MU.224			385	220									
MU.225			435	270									
MU.226			515	350									
MU.227	SP 18	0.17	255	90	165	3/4"	98	100	130	151	115	7	70°C
MU.228			285	120									
MU.229			335	170									
MU.230			385	220									
MU.231			435	270									
MU.232			515	350									
MU.233	SP 25	0.26	305	90	215	3/4"	98	100	130	170	115	7	70°C
MU.234			335	120									
MU.235			385	170									
MU.236			435	220									
MU.237			485	270									
MU.238			565	350									
MU.239	SP 33	0.36	305	90	215	3/4"	98	100	130	170	115	7	70°C
MU.240			335	120									
MU.241			385	170									
MU.242			435	220									
MU.243			485	270									
MU.244			565	350									
MU.201	SP 50	1.00	450	200	250	1-1/4"	138	140	180	215	160	9	70°C
MU.202			520	270									
MU.203			600	350									
MU.204			690	440									
MU.205			800	550									
MU.206	SP 75	1.20	450	200	250	1-1/4"	138	140	180	215	160	9	70°C
MU.207			520	270									
MU.208			600	350									
MU.209			690	440									
MU.210			800	550									
MU.211	SP 100	1.41	500	200	300	1-1/4"	138	140	180	230	160	9	70°C
MU.212			570	270									
MU.213			650	350									
MU.214			740	440									
MU.215			850	550									
MU.216	SP 150	1.86	500	200	300	1-1/4"	138	140	180	230	160	9	70°C
MU.217			570	270									
MU.218			650	350									
MU.219			740	440									
MU.220			850	550									

N.B. Per il corretto utilizzo delle pompe si consiglia la visione della **tabella impieghi** illustrata a pagina 108.
NOTE: For correct pump use, see **uses table** on page 108.