


TENUTE MECCANICHE GRUNDFOS

GRUNDFOS MECHANICAL SEALS

NOVITÀ
NEW

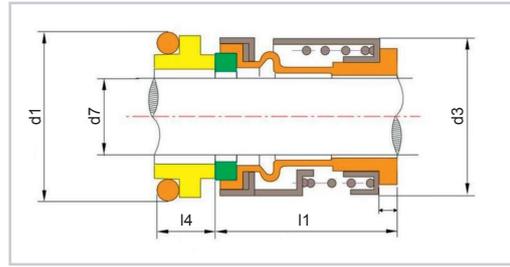

SERIE / SERIES TG

Tenuta e controfaccia in carburo di silicio -
Guarnizioni in EPDM.

Silicon carbide seal and counterface -
EPDM rubber gasket.

LIMITI D'IMPIEGO

$p = 10 \text{ kg/cm}^2$ - $v = 10 \text{ m/s}$ - $t = -40^\circ + 150^\circ \text{C}$

Limits of use

$p = 10 \text{ kg/cm}^2$ - $v = 10 \text{ m/s}$ - $t = -40^\circ + 150^\circ \text{C}$

Tenuta completa di controfaccia


Seal complete with counterface

Articolo Art.	d7	d3	l1	d1	l4
TGU.12	12	22	32	23	8
TGU.16	16	26	32	27	7,5

TENUTE A CARTUCCIA GRUNDFOS

GRUNDFOS CARTRIDGE SEALS

NOVITÀ
NEW

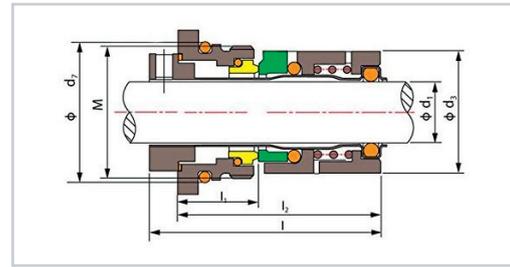

SERIE / SERIES TGE


Tenuta e controfaccia in silicio-silicio.
Guarnizioni in VITON®.

Silicon-silicon seal and counterface.
VITON® rubber gaskets.

Tenuta completa di controfaccia

Seal complete with counterface

Articolo Art.	d1	d7	d3	m	l	l1	l2
TGE.12	12	29	25	28x1.5	55	19	30
TGE.16	16	34	30.5	33x1.5	57.5	20	30.5

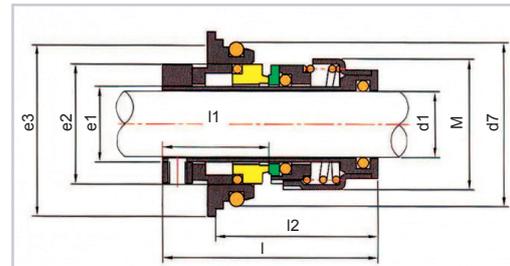

Tenuta e controfaccia in silicio-silicio.
Guarnizioni in VITON®.

Silicon-silicon seal and counterface.
VITON® rubber gaskets.

Tenuta completa di controfaccia

Seal complete with counterface

Articolo Art.	d1	d7	e1	e2	e3	m	l1	l2	l
TGC.22	22	50	24.5	39	60	42	35	54.5	72